


Ceramic Disc Capacitors Class 1 and 2, 1 kV_{DC} to 50 kV_{DC}, General Purpose

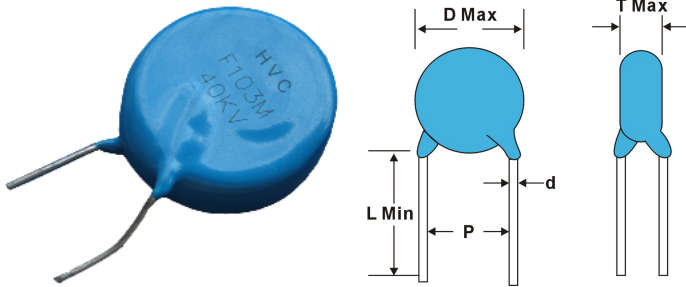

Capacitors with 7.5 mm (0.30") to 15 mm (0.40") lead spacing(P)

QUICK REFERENCE DATA	
DESCRIPTION	UJ,SL,X5F,X7R,N4700,Y5T,Y5U,Y5V
Voltage (V _{DC})	1000 to 50000
Min. Capacitance (pF)	10
Max. Capacitance (pF)	33 000
Mounting	Through hole

OPERATING TEMPERATURE RANGE

Class 1: SL, - 40 °C to + 125 °C

Class 1: N4700, - 25 °C to + 100 °C

Class 2: Y5T, Y5U, Y5V, - 25 °C to + 85 °C

Class 2: X7R, - 40 °C to + 125 °C

TEMPERATURE COEFFICIENTS

Class 1 SL, N4700

Class 2 X7R, Y5P, Y5T, Y5V, X5F, Y5U

CAPACITANCE RANGE

10 pF to 33 000 pF

RATED DC VOLTAGE

1 kV to 50 kV

DIELECTRIC STRENGTH

200 % of rated voltage

FEATURES

- Low losses
- High stability
- High capacitance in small size
- Kinked (preferred) or straight leads
- Compliant to RoHS directive 2002/95/EC

APPLICATIONS

- DC high voltage
- Pulse high voltage
- SMPS
- HV power supply
- HF ballast

DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper.

The capacitors may be supplied with kinked or straight leads with a lead spacing of 5 mm (0.20"), 7.5 mm (0.30") or 10 mm (0.40") and a lead length from 4 mm to 30 mm. The standard tolerance on capacitance is 5 % or 10 % for class 1 capacitors and ± 10 % or ± 20 % for class 2 capacitors. Encapsulation is made of blue-colored epoxy-resin.

INSULATION RESISTANCE AT 500 V_{DC}

N4700: >= 200 000 MΩ

UJ,SL,X5F,X7R,Y5T: >= 100 000 MΩ

Y5U,Y5V: >= 10 000 MΩ

TOLERANCE ON CAPACITANCE

± 5 %; ± 10 %; ± 20 %; + 80/- 20 %

Other tolerances available on request

DISSIPATION FACTOR

UJ,SL: 6X10⁻⁴

X5F: 1%

X7R: 1.5%

N4700: 0.1% to 0.2%

Y5T: 1%

Y5U,Y5V: 2%



RoHS
COMPLIANT



Ceramic Disc Capacitors Class 1 and 2, 1 kV_{DC} to 50 kV_{DC} , General Purpose

NO.	Part Number	Material	Max (mm)			
			D	T	P	d
1	HVC81-2KV-UJ08-F5-10PK	UJ	8	4	5	0.6
2	HVC81-2KV-UJ08-F5-15PK	UJ	8	4	5	0.6
3	HVC81-2KV-SL08-F5-22PK	SL	8	4	5	0.6
4	HVC81-2KV-SL08-F5-27PK	SL	8	4	5	0.6
5	HVC81-2KV-SL08-F5-33PK	SL	8	4	5	0.6
6	HVC81-2KV-SL08-F5-47PK	SL	8	4	5	0.6
7	HVC81-2KV-SL08-F5-56PK	SL	8	4	5	0.6
8	HVC81-2KV-SL08-F5-68PK	SL	8	4	5	0.6
9	HVC81-2KV-SL08-F5-101K	SL	8	4	5	0.6
10	HVC81-2KV-SL12-F9.5-151K	SL	12	4	9.5	0.6
11	HVC81-2KV-SL12-F9.5-221K	SL	12	4	9.5	0.6
12	HVC81-2KV-SL14-F9.5-331K	SL	14	4	9.5	0.6
13	HVC81-2KV-SL16-F9.5-471K	SL	16	4	9.5	0.6
14	HVC81-2KV-SL18-F9.5-561K	SL	18	4	9.5	0.6
15	HVC81-2KV-X08-F5-101K	X5F	8	4	5	0.6
16	HVC81-2KV-DL06-F5-101K	N4700	6	4	5	0.6
17	HVC81-2KV-X08-F5-221K	X5F	8	4	5	0.6
18	HVC81-2KV-DL08-F5-221K	N4700	8	4	5	0.6
19	HVC81-2KV-DL08-F5-271K	N4700	8	4	5	0.6
20	HVC81-2KV-DL08-F5-331K	N4700	8	4	5	0.6
21	HVC81-2KV-X08-F5-331K	X7R	8	4	5	0.6
22	HVC81-2KV-DL08-F5-471K	N4700	8	4	5	0.6
23	HVC81-2KV-X08-F5-471K	X7R	8	4	5	0.6
24	HVC81-2KV-DL08-F5-561K	N4700	8	4	5	0.6
25	HVC81-2KV-X08-F5-561K	X7R	8	4	5	0.6
26	HVC81-2KV-DL10-F7.5-681K	N4700	10	4	7.5	0.6
27	HVC81-2KV-X08-F5-681K	X7R	8	4	5	0.6
28	HVC81-2KV-DL10-F7.5-102K	N4700	10	4	7.5	0.6
29	HVC81-2KV-X09-F7.5-102K	X7R	9	4	7.5	0.6
30	HVC81-2KV-DL14-F9.5-222K	N4700	14	4	9.5	0.6
31	HVC81-2KV-X12-F9.5-222K	X7R	12	4	9.5	0.6
32	HVC81-2KV-E08-F9.5-222M	Y5U	8	4	5	0.6
33	HVC81-2KV-DL17-F9.5-272K	N4700	17	4	9.5	0.65
34	HVC81-2KV-D14-F9.5-272K	Y5T	14	4	9.5	0.6
35	HVC81-2KV-E08-F5-272M	Y5U	8	4	5	0.6
36	HVC81-2KV-DL17-F9.5-332K	N4700	17	4	9.5	0.65
37	HVC81-2KV-D14-F9.5-332K	Y5T	14	4	9.5	0.6
38	HVC81-2KV-E08-F5-332M	Y5U	8	4	5	0.6
39	HVC81-2KV-X18-F9.5-472K	X7R	18	4	9.5	0.65
40	HVC81-2KV-D14-F9.5-472K	Y5T	14	4	9.5	0.6
41	HVC81-2KV-E10-F9.5-472M	Y5U	10	4	9.5	0.6
42	HVC81-2KV-D20-F9.5-103K	Y5T	20	4	9.5	0.8
43	HVC81-2KV-E16-F9.5-103M	Y5U	16	4	9.5	0.6
44	HVC81-2KV-F14-F9.5-103M	Y5V	14	4	9.5	0.6

NO.	Part Number	Material	Max (mm)			
			D	T	P	d
45	HVC81-3KV-UJ08-F5-10PK	UJ	8	4.5	5	0.6
46	HVC81-3KV-UJ08-F5-15PK	UJ	8	4.5	5	0.6
47	HVC81-3KV-SL08-F5-22PK	SL	8	4.5	5	0.6
48	HVC81-3KV-SL08-F5-27PK	SL	8	4.5	5	0.6
49	HVC81-3KV-SL08-F5-33PK	SL	8	4.5	5	0.6
50	HVC81-3KV-SL08-F5-47PK	SL	8	4.5	5	0.6
51	HVC81-3KV-SL08-F5-56PK	SL	8	4.5	5	0.6
52	HVC81-3KV-SL08-F5-68PK	SL	8	4.5	5	0.6
53	HVC81-3KV-SL08-F5-101K	SL	8	4.5	5	0.6
54	HVC81-3KV-SL12-F9.5-151K	SL	12	4.5	9.5	0.6
55	HVC81-3KV-SL12-F9.5-221K	SL	12	4.5	9.5	0.6
56	HVC81-3KV-SL14-F9.5-331K	SL	14	4.5	9.5	0.6
57	HVC81-3KV-SL17-F9.5-471K	SL	16	4.5	9.5	0.7
58	HVC81-3KV-SL19-F9.5-561K	SL	18	4.5	9.5	0.7
59	HVC81-3KV-X08-F5-101K	X5F	8	4.5	5	0.6
60	HVC81-3KV-DL06-F5-101K	N4700	6	4.5	5	0.6
61	HVC81-3KV-X08-F5-221K	X5F	8	4.5	5	0.6
62	HVC81-3KV-DL06-F5-221K	N4700	6	4.5	5	0.6
63	HVC81-3KV-DL08-F5-271K	N4700	8	4.5	5	0.6
64	HVC81-3KV-DL08-F5-331K	N4700	8	4.5	5	0.6
65	HVC81-3KV-X08-F5-331K	X7R	8	4.5	5	0.6
66	HVC81-3KV-DL08-F5-471K	N4700	8	4.5	5	0.6
67	HVC81-3KV-X08-F5-471K	X7R	8	4.5	5	0.6
68	HVC81-3KV-DL08-F5-561K	N4700	8	4.5	5	0.6
69	HVC81-3KV-X08-F5-561K	X7R	8	4.5	5	0.6
70	HVC81-3KV-X18-F9.5-472K	X7R	18	4.5	9.5	0.6
71	HVC81-3KV-D14-F9.5-472K	Y5T	14	4.5	9.5	0.6
72	HVC81-3KV-E10-F7.5-472M	Y5U	10	4.5	9.5	0.6
73	HVC81-3KV-D20-F9.5-103K	Y5T	20	4.5	9.5	0.8
74	HVC81-3KV-E17-F9.5-103M	Y5U	17	4.5	9.5	0.7
75	HVC81-6KV-N09-F9.5-10PK	NPO	9	6	9.5	0.6
76	HVC81-6KV-UJ08-F9.5-10PK	UJ	8	5	9.5	0.6
77	HVC81-6KV-UJ08-F9.5-22PK	UJ	8	5	9.5	0.6
78	HVC81-6KV-UJ08-F9.5-33PK	UJ	8	5	9.5	0.6
79	HVC81-6KV-UJ09-F9.5-47PK	UJ	9	5	9.5	0.6
80	HVC81-6KV-X09-F9.5-101K	X5F	9	6	9.5	0.6
81	HVC81-6KV-DL06-F5-101K	N4700	6	4	5	0.5
82	HVC81-6KV-X10-F9.5-221K	X5F	10	5	9.5	0.6
83	HVC81-6KV-DL08-F9.5-221K	N4700	8	6	9.5	0.6
84	HVC81-6KV-DL10-F9.5-331K	N4700	10	5	9.5	0.6
85	HVC81-6KV-DL10-F9.5-471K	N4700	10	5	9.5	0.6
86	HVC81-6KV-D12-F9.5-102K	Y5T	12	6	9.5	0.6
87	HVC81-6KV-E08-F9.5-102M	Y5U	8	5	9.5	0.6
88	HVC81-6KV-D14-F9.5-222K	Y5T	14	5	9.5	0.6



Ceramic Disc Capacitors Class 1 and 2, 1 kV_{DC} to 50 kV_{DC} , General Purpose

Table with 2 columns and 14 rows of data. Columns include NO., Part Number, Material, and Max dimensions (D, T, P, d). Rows list various capacitor models like HVC81-50KV-SL12-F12.5-22PK, HVC-10KV-X09-F9.5-101K, etc.